

12V 220Ah Slimline Battery

Constructed using the latest lithium iron phosphate cells. These prismatic cells are the highest quality in a metal hard case. The battery has an inbuilt Battery Management System (BMS) designed and developed in Australia.

At just under 23 kg, the unique slimline shape makes it the perfect battery for installations where space is a premium. Slide it behind a seat, bolt it to a wall or at the back of a cupboard.

The battery provides up to 240A of continuous discharge or charge and can be used in parallel to increase capacity. Charge and discharge via the M8 threaded hole terminals.

The strong aluminium outer enclosure delivers a safe, lightweight and powerful unit which is the perfect building block for next generation battery systems.

RM12-220LFPXSL

Chemistry	LiFePO ₄
Nominal Voltage	12.0 V
Nominal Capacity	220 Ah
Nominal Energy	2.7 kWh
Input Charge Voltage	13.8 V - 14.6 V
	14.0 V recommended
100% SoC Voltage	13.8 V
Low Voltage cut-off	10.5 V approx
Charge Current	240 A max
Discharge Current	240 A max cont.
	480 A surge
Operating Temp.	See overleaf
Weight	22.6 kg
Packaged Weight	23.2 kg approx.
Life at 80% DoD	2000 cycles
Life at 50% DoD	5000 cycles
Parallel Capable	Yes (Unlimited)
Series Capable	Yes (Max. 2 in series)
Size	W 257 mm
	D 90 mm
	L ₁ 609 mm
	L ₂ 619 mm (inc. terminals/handles)


FEATURES

- ✓ Strong, compact aluminium enclosure
- ✓ Internal BMS
- ✓ Over/Under voltage protection
- ✓ Overcurrent protection
- ✓ Short circuit protection
- ✓ Parallel connect capable
- ✓ M8 Threaded Hole Terminals
- ✓ Battery On/Off Switch
- ✓ Designed and fully assembled in Australia



12V 220Ah Slimline Battery

TEMPERATURE NOTICE

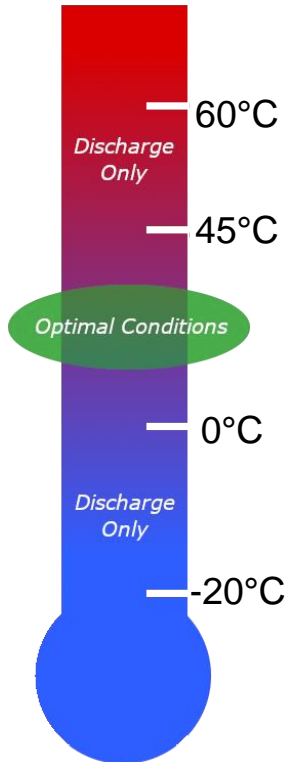

At temperatures above 60°C, the battery must **NOT** be **operated** (charge or loads). Please move the battery into a cooler environment.

At temperatures above 45°C, the battery must **NOT** be **charged**. Battery lifespan is reduced in these conditions.

Maintain your battery within this range for optimum battery lifespan and performance.

At temperatures below 0°C, the battery must **NOT** be **charged**. Battery performance is reduced in these conditions.

At temperatures below -20°C, the battery must **NOT** be **operated** (charge or loads). Please move the battery into a warmer environment.

INCLUSIONS

Mounting bracket kit

WIREFRAME DIAGRAM

